


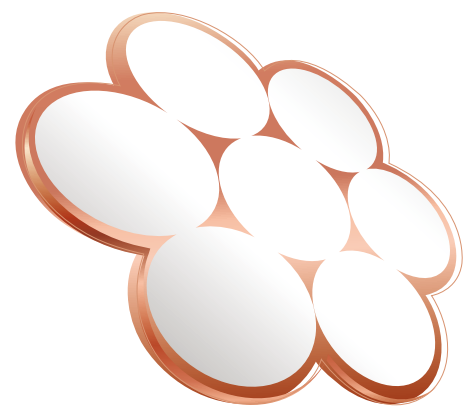

Meitong Tech


ZHEJIANG MEITONG CONDUCTOR TECHNOLOGY CO.,LTD.

📍 No.102 Building 5, No.2968 Huiling Road, Linghu Town, Nanxun District,Zhejiang Province,China

☎ 86-572-2107909


✉ chris@meitongtech.com adela@meitongtech.com

🌐 www.meitongtech.com

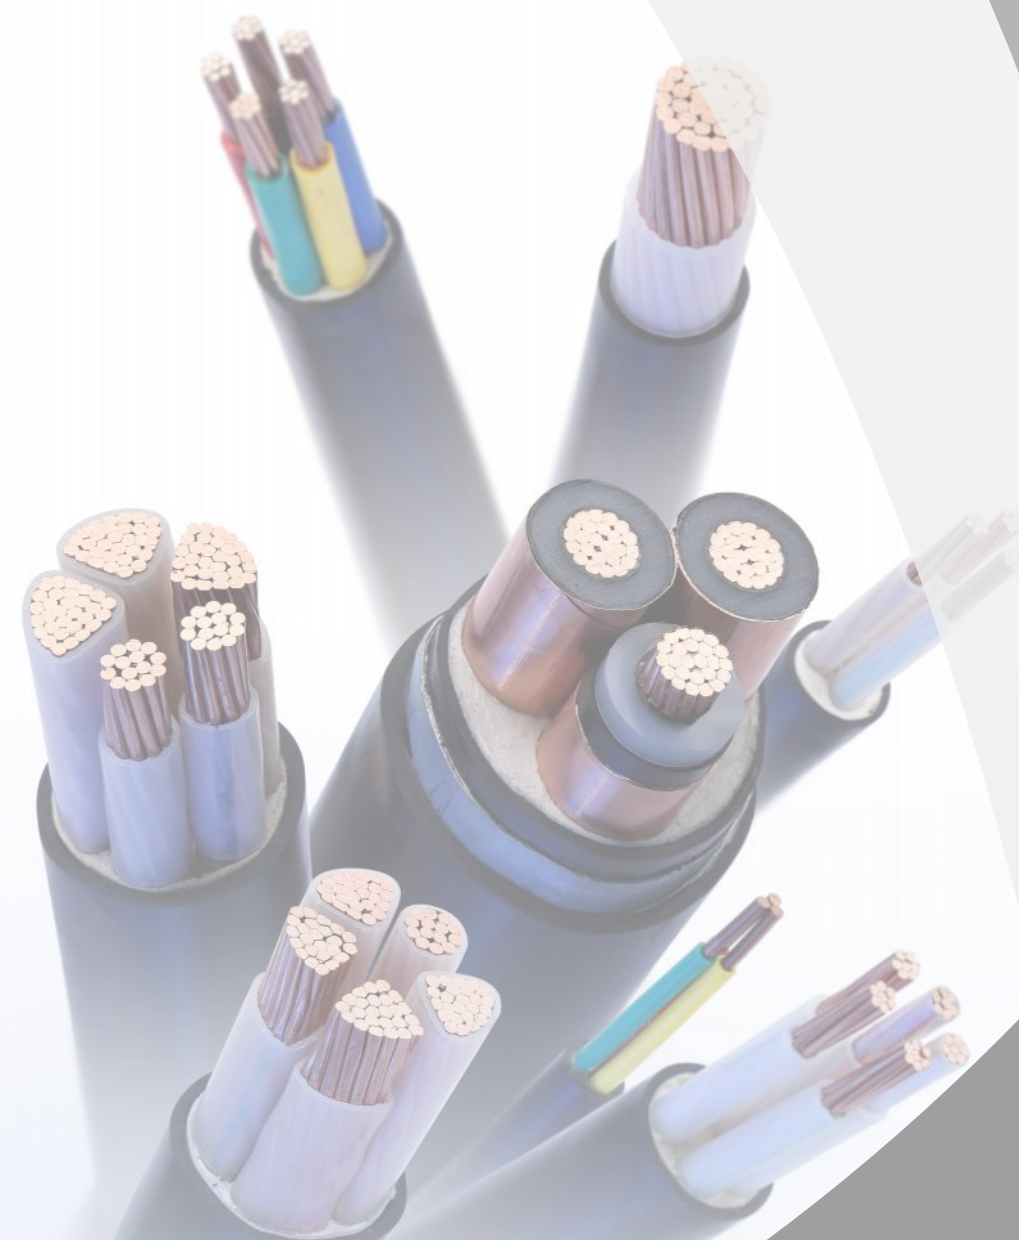

HIGH VISION NEW HORIZON

COPPER CLAD ALUMINUM STRANDED WIRE

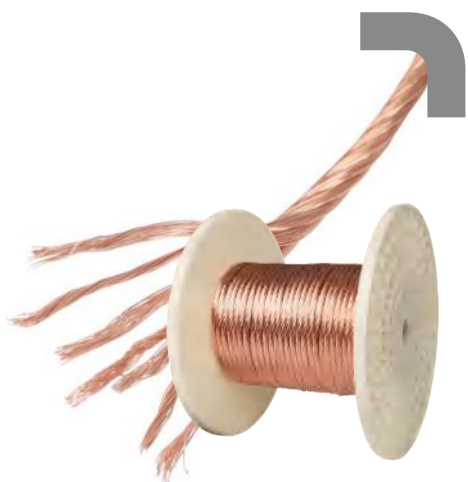

Application

- 1.THW cable
- 2.Extension cable
- 3.Rf cable
- 4.Building cable
- 5.Boost/battery cable
- 6.Welding cable
- 7.Speaker cable

Specification and Technology date				
Section area(mm²)	Structure(number/mm)	Resistance(Ω/km) max	Tensile Strength (Mpa)	Elongation
0.60/0.50	19/0.20	42.20	100-150	1-25
0.75	19/0.23	34.18		
1.00	19/0.26	26.75		
1.50	19/0.32	17.65		
2.00	19/0.36	13.95		
2.50	19/0.41	10.32		
3.00	19/0.47	8.32		
4.00	19/0.53	6.48		
5.00	19/0.59	5.23		
8.00	19/0.73	3.42		
10.00	19/0.82	2.7		
15.00	19/1.01	1.75		
20-400	All technology data and structure are complied customer's request			

COPPER CLAD STEEL STRANDED WIRES



Application

- 1.Earth rod for power industry
- 2.Trolley wire for power transmission
- 3.Overhead-contact systems for railway
- 4.Connectors for electronic components
- 5.Strengthened conductivity wire core for special cable

CCS Stranded & Bunched Wire						Note:
Conductor Size Designation	Nominal Diameter		Nominal Total Cross-Section	Minimum Rated Tensile Strength	Max.DC Resistance at 20°C	All Above Copper-Clad-Steel Wire Conforming To ASTM B910/ B910M
AWG	Overall(mm)	Individual Wire (mm)	(mm²)	(KN)	(Ohm/km)	
3NO.12	4.09	2.05	9.929	4.59	4.465	
3NO.10	5.17	2.588	15.781	6.68	2.808	
3NO.8	6.52	3.264	25.097	8.02	1.7662	
7NO.10	7.77	2.588	36.83	9.15	1.244	
7NO.9	8.71	2.906	46.44	11.5	0.9865	
7NO.8	9.78	3.264	58.57	14.54	0.782	
7NO.7	11.00	3.665	73.87	18.34	0.6202	
7NO.6	12.34	4.115	93.1	23.13	0.492	
7NO.5	13.87	4.62	117.42	29.14	0.3903	
7NO.4	15.57	5.189	148.04	36.77	0.3094	
19NO.8	16.31	3.264	158.97	39.45	0.2892	
19NO.7	18.31	3.665	200.45	49.79	0.2294	
19NO.6	20.57	4.115	252.71	62.77	0.1819	
19NO.5	23.11	4.62	318.71	79.1	0.1443	

TIN PLATED COPPER &CCA WIRE



Application

1. Leading wires for Electronic components
2. Jump wires for plug-ins
3. Transformer skeleton pin
4. Capacitance fuses
5. Fuse material
6. Braided wire
7. An ideal conductor material in the communication, electronic and power industries

Nominal Diameter (mm)	Allowable Tolerance (mm)	Thickness of Tin(μin)		Tensile Strength(Mpa)		Elongation (nominal distance 250mm) (%)	
		I	II	R	Y/TY	R	TY
0.08	±0.003	0.3<h≤0.5	0.5<h≤1	≥320	≥900	≥10	≥0.5
0.10							
0.12							
0.16							
0.2							
0.254							
0.3	±0.01	5<h≤10	10<h≤15	≥290	≥900	≥10	≥1.5
0.4					1100-1250		
0.5					≥900		
0.51					900-1100		
0.59							
0.60							
0.61							
0.63							
0.65							
0.7					±0.015		
0.71	850-1000						
0.8	≥700						
0.83							
0.91							
1.0							
1.1	±0.02						
1.2							

ALUMINUM ALLOY STRANDED WIRE



Application

1. THW cable
2. Building cable
3. ACSR
4. AAAC
5. Low & middle voltage cable
6. Extension cord cable
7. Other kinds of power cable
8. Solar cable

Specification and Technology data							
Code	Nom.area	Stranding	cla Size	O.D	mass	Strength	Resistance(20°C)
	mm ²	No./mm	mm ²	mm	kg/km	kgf	Ω /km
Box	15	7/1.85	18.82	5.55	51	537	1.7495
Acacia	20	7/2.08	23.79	6.24	65	680	1.384
Almond	25	7/2.34	30.1	7.02	82	861	1.0934
Cedar	30	7/2.54	35.47	7.62	97	1014	0.9281
-	35	7/2.77	42.18	8.31	115	1205	0.7804
Fir	40	7/2.95	47.87	8.85	131	1367	0.688
Hazel	50	7/3.30	59.87	9.9	164	1711	0.5498
Pine	60	7/3.61	71.65	10.83	194	2048	0.4594
-	70	7/3.91	84.05	11.73	130	2402	0.3917
Willow	75	7/4.04	89.73	12.12	245	2565	0.3669
-	80	7/4.19	96.52	12.57	264	2758	0.3441
-	90	7/4.44	108	13.32	298	3112	0.3023
Oak	100	7/4.65	118.9	13.95	325	3398	0.2769
-	100	19/2.82	118.7	14.1	326	3393	0.2787
mulberry	125	19/3.18	150.9	15.9	415	4312	0.2192
Ash	150	19/3.48	180.7	17.4	497	5164	0.1831
Elm	175	19/3.76	211	18.8	580	6030	0.1568
Poplar	200	37/2.87	239.4	20.09	659	8841	0.1385
-	225	37/3.05	270.3	21.35	744	7724	0.1227
Sycamorc	250	37/3.22	303.2	22.54	835	8664	0.1093
Upas	300	37/3.53	362.1	24.71	997	10350	0.09156
Walnut	350	37/3.81	421.8	26.67	1162	12053	0.0786
Yew	400	37/4.06	479	28.42	1319	13685	0.06921
Totara	425	37/4.14	498.1	28.98	1372	14233	0.06656
Rubus	500	61/3.50	586.9	31.5	1620	16771	0.05662
Araucaria	700	61/4.14	821.1	37.25	2266	23450	0.01047

NICKEL COATED COPPER WIRE

Standard: GB11019 / ASTMB355—95 or customized



	Nominal Diameter(mm)			
	0.05≤d≤0.1	0.1<d≤0.23	0.23<d≤0.5	0.5<d≤3.26
Tolerance (mm)	±0.002	±0.003	±0.004	±d%
Electrical Resistivity (Ωm m²/m)	GB/T11019-2021 form5			
Elongation (%)	GB/T11019-2021 form4			
Tensile Strength (Mpa)	Soft: ≥196 Hard: ≥350			
Coating Lay thickness (um)	0.3-5.0um			
Exterior	No scratches, oil stains,copper exposure,oxidation.etc			
packing	8inch、9inch、type300-plastic reel			
Note	Can be customized			

SILVER PLATED COPPER WIRE



Silver Plated Copper Wire - Single				
Project	Diameter(mm)			
	0.05≤d≤0.1	0.1<d≤0.25	0.25<d≤0.5	0.5<d≤2.0
tolerance(mm)	±0.002	±0.003	±0.004	±d%
electrical resistivity (Ωmm²/m)	≤0.017241 (soft)			
	≤0.01796 (hard)			
Elongation (%)	≥13%	≥18%	≥20%	≥25%
Tensile Strength(Mpa)	soft:≥196 hard:≥350			
plating(um)	0.2—10um			
appearance	No scratches, oil, copper exposure, oxidation and other abnormalities			
Package	5 inch, 8 inch, 9 inch, 300 type, 400 type rubber disc, 400 type steel disc, 500 type steel disc, etc			
remark	Can be changed according to customer requirements			

Silver Plated Copper Wire - Stranded			
Project	Diameter(mm)		
	0.05≤d≤0.09	0.09<d≤0.25	0.25<d≤0.5
tolerance(mm)	±0.003	±0.004	±0.005
electrical resistivity(Ωmm²/m)	≤0.01851	≤0.01802	≤0.0177
Elongation (%)	≥6	≥12	≥15
number wire	7-100		
lay direction	S OR Z		
Resistance(mm)	2.0—100mm		
Tensile Strength(Mpa)	≥196		
plating(um)	0.3—2.0um		
appearance	No scratches, oil, copper exposure, oxidation and other abnormalities		
Package	DIN200、DIN300、DIN400 rubber disc, 400 type steel disc, DIN500 steel disc, etc		
remark	Can be changed according to customer requirements		

AgCu-Alloy Wire

The AgCu-Alloy Wire not only has high strength and high electrical conductivity, but also has excellent creep resistance, fatigue resistance, heat resistance, wear resistance and electrical contact performance.

Product type	CLASS	Wire diameter (mm)	Tensile Strength (MAP)	Elongation (%)	Electrical Conductivity (%)
0.6%Ag	Hard state	0.09	≥490	≥0.2	≥90
1%Ag	Hard state	0.09	≥540	≥0.2	≥89
2%Ag	Hard state	0.09	≥590	≥0.2	≥85
4%Ag	Hard state	0.09	≥660	≥0.2	≥78



SnCu -Alloy Wire

SnCu -Alloy Wire has excellent tensile strength and good bending performance. Moreover, in the subsequent process, a reasonable heat treatment process is adopted. The wire has good drawability, greatly reducing the wire breakage rate of drawn wires.

Product type	CLASS	Wire diameter (mm)	Tensile Strength (MAP)	Elongation (%)	Electrical Conductivity (%)
0.15%Sn	Hard state	0.09	≥490	≥0.2	≥85
0.3%Sn	Hard state	0.09	≥530	≥0.2	≥75
0.7%Sn	Hard state	0.09	≥580	≥0.2	≥60
1.35%Sn	Hard state	0.09	≥660	≥0.2	≥46
3.5%Sn	Hard state	0.09	≥920	≥0.2	≥25


Available sizes: 0.05 to 1.0mm (other sizes are available through consultation)



MgCu-Alloy Wire


MgCu-Alloy Wire has excellent electrical conductivity and high tensile strength. In addition to being applied to load-bearing cables and contact wires for electrified railways, it is also widely used in special wires such as speaker leads, automotive wires, airborne antennas, and high-temperature cables.

Product type	Mg content %	Tensile Strength (N/mm²)		Electrical Conductivity (%)	
		Y	M	Y	M
0.2%Mg	0.2±0.05	≥450	≥220	≥75	≥82
0.5%Mg	0.5±0.05	≥600	≥240	≥62	≥75
0.8%Mg	0.8±0.05	≥700	≥260	≥50	-

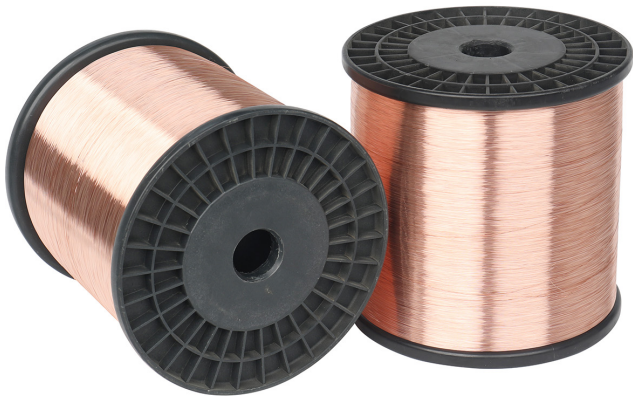

Other Alloy Wire

Name of Material	size (mm)	Tensile Strength (MAP)	Elongation (%)	Coated/Plated
CuCr-Alloy	0.03-1.8	≥770	1-5	Sliver/Tin/Nickel
100% Ag Wire	0.03-4.0	≥130	1-5	Sliver/Tin/Nickel
NiCr-Alloy	0.03-1.0	≥800	1-5	Sliver/Tin/Nickel
Ni-Cr-Ti Alloy	Cr20Ni80	Cr30Ni70	Cr30Ni70	Cr20Ni35
NbCu Alloy	0.03-1.0	≥770	1-5	Glod/Sliver/Tin/Nickel
BeCu Alloy	0.03-1.2	≥1000	1-5	Sliver/Tin/Nickel

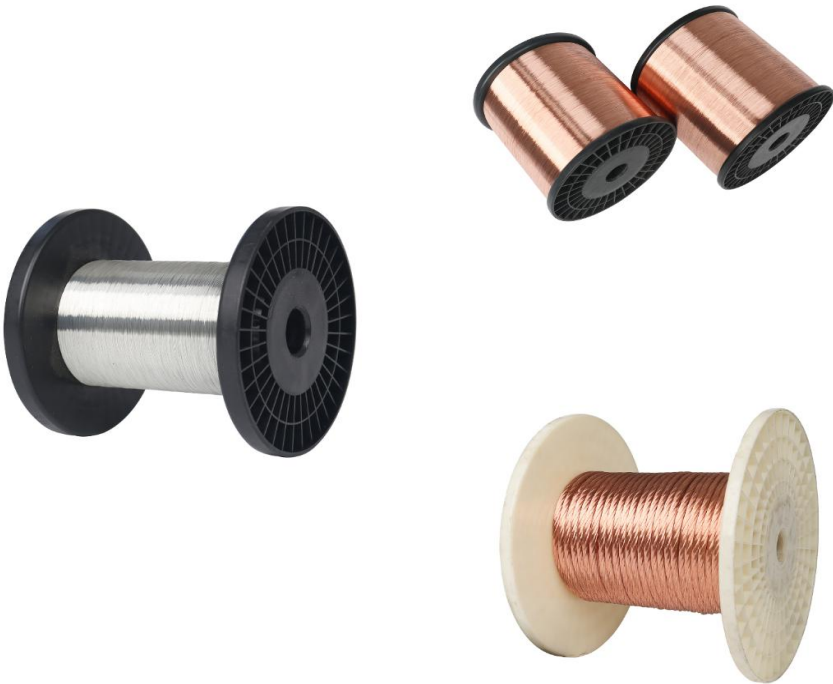

COPPER BRAIDED WIRE



Flat copper braided wire is used for electrical equipment, electricity equipment, electronic railway Net electricity, electricla switches, industrial furnace, batteries and other soft connecting wire. It's made by high purity cathode copper rod , the tinned type is made by electrolytic or electric tin plating process, which has high corrosion resistance

Copper braided wire's products standards: GB6313
Copper braided wire `s products type:TZ-20/TZX-20
Copper braided wire `s products type:TZ-15/TZX-15
Copper braided wire `s products type:TZ-10/TZX-10



- 1. TZ-20/TZX-20 type copper braided wire structure is presented in Table 1
- 2. TZ-15/TZX-15 type copper braided wire structure is presented in Table 2
- 3. TZ-10/TZX-10 type copper braided wire structure is presented in Table 3

GB6313.92 TZ-20 & TZX-20 Table one

Section mm²		Structure: Number of wires* qty/diameter of a single wire	Size mm		20℃ direct current resistance (Ω/km) no more than		Calculating weight kg/km
Standard	Calculating		The Max width	Thick ness for reference	TZ-20	TZX-20	
16	16.59	24*22*1/0.20	16	3.0	1.30	1.36	166
25	24.88	24*33*1/0.20	18	3.5	0.87	0.91	249
35	33.18	24*44*1/0.20	20	4.0	0.65	0.68	331
50	49.77	24*33*2/0.20	22	5.0	0.43	0.45	498
70	66.36	24*44*2/0.20	24	6.5	0.32	0.33	664
95	90.49	24*40*3/0.20	20		0.24	0.25	905
120	120.65	24*40*4/0.20	22		0.18	0.19	1207
150	150.82	24*40*5/0.20	24		0.14	0.15	1508
185	180.98	24*40*6/0.20	26		0.12	0.13	1810
240	241.31	24*40*8/0.20	30		0.089	0.093	2413
300	301.63	24*40*10/0.20	35		0.071	0.075	3016
400	401.17	24*40*10/0.20	40		0.054	0.056	4004
		+36*44*2/0.20					
500	500.65	34*40*10/0.20	45		0.043	0.045	5007
		+48*44*3/0.20					
630	633.43	24*40*10/0.20	50		0.034	0.036	6334
		+48*44*5/0.20					
800	766.15	24*40*10*0.20	55		0.028	0.029	7661
		+48*44*7/0.20					

GB6313.92 TZ-15 & TZX-15 Table Two

Section mm²		Structure: Number of wires* qty/diameter of a single wire	Size mm		20℃ direct current resistance (Ω/km) no more than		Calculating weight kg/km
Standard	Calculating		The Max width	Thick ness for reference	TZ-20	TZX-20	
4	3.39	48*4*1/0.15	9	1.0	6.36	6.65	34
4	3.82	36*6*1/0.15	9	1.5	5.64	5.89	38
6	5.09	48*6*1/0.15	12	1.2	4.23	4.42	51
10	10.18	48*12*1/0.15	20	1.4	2.12	2.22	102
10	10.18	36*16*1/0.15	16	2.0	2.12	2.22	102
16	16.96	48*20*1/0.15	22	2.0	1.27	1.33	170
16	16.54	36*26*1/0.15	20	2.5	1.30	1.35	166
20	20.36	36*32*1/0.15	22	3.0	1.06	1.10	204
25	25.44	48*30*1/0.15	22	3.0	0.85	0.89	254
25	25.44	36*40*1/0.15	26	3.0	0.85	0.89	254
35	33.93	48*20*2/0.15	26	3.2	0.64	0.67	340
35	35.62	36*56*1/0.15	32	3.0	0.61	0.64	357
50	50.89	48*20*3/0.15	28	4.8	0.42	0.44	510
50	50.89	36*40*2/0.15	28	5.0	0.43	0.44	510
70	71.25	48*28*3/0.15	36	5.0	0.30	0.31	714
70	71.25	36*56*2/0.15	35	6.0	0.30	0.31	714
75	76.33	36*40*3/0.15	30	7.0	0.28	0.29	765
95	95.00	40*28*4/0.15	40	6.0	0.23	0.24	950
120	118.74	48*28*5/0.15	42	7.0	0.18	0.19	1187

GB6313.92 TZ-10 & TZX-10 Table Three

Section mm²		Structure: Number of wires* qty/diameter of a single wire	Size mm		20℃ direct current resistance (Ω/km) no more than		Calculating weight kg/km
Standard	Calculating		The Max width	Thick ness for reference	TZ-20	TZX-20	
4	3.96	36*14*1/0.10	8	1.0	5.44	5.69	40
6	5.93	36*21*1/0.10	10	1.2	3.63	3.79	59
10	10.17	36*36*1/0.10	14	2.0	2.12	2.22	120
16	15.83	36*56*1/0.10	16	2.5	1.36	1.42	158
25	23.74	36*42*2/0.10	18	3.5	0.91	0.95	237
35	35.61	36*42*3/0.10	20	4.5	0.60	0.63	156

SOFT CONNECTING WIRE



Soft connecting wires are widely used in various types of vacuum circuit breaker, wire and cable soft conductor; electrical equipment soft connection, electronic railway contact network and high &low voltage switch, transformer, Low voltage leadingout terminal, electric welding machine, seam welding machine and resistance welding machine

- The main products: 1.soft connection of braided copper wire
- 2.soft connection of soft copper stranded wire



The soft connection wire`s conductor is soft copper stranded wire or the copper braiding wire. On both ends ,there is tubular steel or tinned brass. According to the size of the joint, process it to a Soft connection wire or Soft grounding wire.

- 1 .The characteristics of the products
 - 1) The braided copper wire is made of high quality round copper wire (0.10mm, 0.15mm,0.20mm) or tinning soft round copper wire (0.10mm, 0.15mm) , braided by multi shares through one layer or multi layer
 - 2) The DC resistivity (20 ℃) of the braided copper wire is max to 0.022 Ω.mm²/m
 - The DC resistivity (20 ℃) of the tinned braided copper wire is max to 0.0234 Ω.mm²/m

COPPER FLAT WIRE

Product Classification: silver plated flat wire / tin plated flat wire / nickel plated flat wire /bare copper flat wire.

Product Application: widely used in fields such as RF cables, stable phase cables, electronics, medical, aerospace, military, etc.




Specifications For Wrapping Tape

size(mm)	width(mm)	width tolerance (mm)	thickness (mm)	thickness tolerance (mm)	plating(um)	elongation (%)
1.0*0.038	1.0	±0.015	0.038	±0.003	2	≥20
1.2*0.05	1.2	±0.015	0.05	±0.003	2	≥25
1.5*0.04	1.5	±0.015	0.04	±0.003	2	≥25
1.5*0.05	1.5	±0.015	0.05	±0.003	2	≥25
2.0*0.05	2.0	±0.020	0.05	±0.003	2	≥25
2.3*0.05	2.3	±0.020	0.05	±0.005	2	≥25
2.5*0.05	2.5	±0.020	0.05	±0.005	2	≥25
3.0*0.08	3.0	±0.025	0.08	±0.005	2	≥25
3.3*0.076	3.3	±0.025	0.076	±0.005	2	≥25
3.5*0.08	3.5	±0.025	0.08	±0.005	2	≥25

Specifications For Braided Tape

size(mm)	width(mm)	width tolerance (mm)	thickness (mm)	thickness tolerance (mm)	plating(um)	elongation (%)
0.17*0.05	0.17	±0.015	0.05	±0.003	0.7-2	≥15
0.3*0.03	0.3	±0.015	0.03	±0.003	0.7-2	≥15
0.3*0.038	0.3	±0.015	0.038	±0.003	0.7-2	≥15
0.4*0.038	0.4	±0.015	0.038	±0.003	0.7-2	≥18
0.5*0.038	0.5	±0.020	0.038	±0.003	0.7-2	≥18
0.8*0.05	0.8	±0.020	0.05	±0.003	0.7-2	≥20
1.0*0.05	1.0	±0.020	0.05	±0.003	0.7-2	≥20
1.2*0.05	1.2	±0.020	0.08	±0.0035	0.7-2	≥20

TINNED COPPER CORE CABLE FOR PHOTOVOLTAIC POWER GENERATION

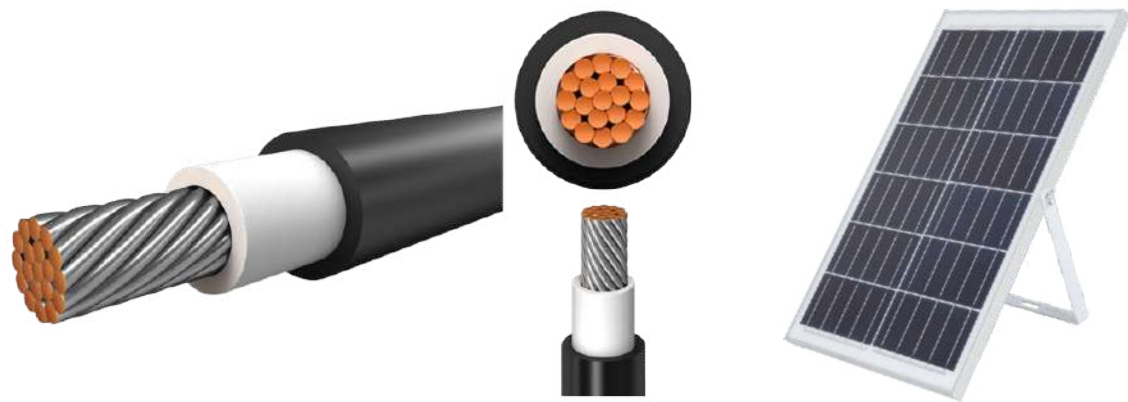

Product specification and important technical parameters

Section (mm ²)	(Tinned copper) Type of conductor	Insulation thickness	Approximate outer diameter	90℃ Min Insulation Resistance MQ.km	20℃ Max Conductor Resistance (Q2/km)		
					H1Z272-K		
2.5	5	0.6	0.7	5.5	5.9	0.69	8.21
4	5	0.6	0.7	6.2	6.6	0.58	5.09
6	5	0.6	0.7	6.8	7.2	0.5	3.39
10	5	0.7	0.8	7.9	8.3	0.42	1.95
16	5	0.7	0.8	9.2	9.6	0.34	1.24
25	5	0.7	1.0	11.2	11.7	0.34	0.795
35	5	0.7	1.0	12.2	13.6	0.29	0.565

Current-Carrying Capacity

Nominal section (mm ²)	Installation method(A)		
	Exposure to the air	Laying on the surface	Surface connection
1.5	30	29	24
2.5	41	39	33
4	55	52	44
6	70	67	57

Nominal section (mm ²)	Installation method(A)		
	Exposure to the air	Laying on the surface	Surface connection
10	98	93	79
16	132	125	107
25	176	167	142
35	218	207	176

Product Standards

This product can be produced according to EU or EN 50618, 2 Pfg 1169/08.2007 or UL 4703 standard, and its performance meets the standard requirements.

Range Of Application

It is used for the connection between solar cell modules and modules, the connection between the battery and the inverter, the connection between the battery array and the controller or the DC junction box.

Characteristic

Equivalent to aluminum alloy photovoltaic cables.

Temperature deviation conversion factor

Ambient temperature (℃)	Below 60	70	80	90	100	110
Conversion factor	1.00	0.91	0.82	0.71	0.58	0.41

ALUMINUM ALLOY CABLES (FLEXIBLE) FOR PHOTOVOLTAIC POWER GENERATION SYSTEM



Product standards

The performance meets the requirements of TUV 2PFG 2642/11.17 or EN50618 standard.

Product characteristics and scope of application

It is suitable for outdoor installation under different climatic conditions, and can also adapt to dry or humid indoor working environment. It has the characteristics of long service life and high cost performance.

It is applicable to the connection between solar cell modules, the connection between battery and inverter, and the connection between battery array and controller or DC junction box.

Product parameters

Rated voltage:

AC: U₀/U:0.6/1KV

DC: 1.5KV、1.8KV(conductor to conductor, ungrounded system, non load line)

(If the cable is used in a DC system, the rated voltage between the two conductors shall not exceed 1.5 times the effective value of the rated voltage U of the cable. In a single-phase grounded DC system, this value should be multiplied by a factor of 0.5.)

Temperature range:

Ambient temperature: -40°C-90°C

Maximum operating temperature of conductor: 125°C

Maximum operating ambient temperature of cable: 90°C

Allowable short circuit temperature 250 °C within 5S

Bending radius. The minimum bending radius is 6 times of the cable diameter

Service life ≥ 25 years

Product model

Model	Name	Application condition
PV/LH-F	Aluminum alloy core solar photovoltaic cable	AA:0.6/1KV DC:below 1.8KV
AAPV1-F		
PV1500V-DC		

Product specifications and important technical parameters

Current carrying capacity

Section mm ²	Insulation thickness (mm)	Approximate outside diameter (mm)	Reference weight (kg/km)	Maximum resistance at 20 °C (Ω/km)	Nominal section mm ²	Installation method		
						Single core cable exposed to the air	Single core cable laid on the surface	single core cable which surface connected
1.5	0.7	4.5	27	19.9	1.5	24	23	19
2.5	0.7	5.0	34	11.9	2.5	32	32	26
4	0.7	6.0	42	7.45	4	43	41	35
6	0.7	6.2	52	4.96	6	55	53	45
10	0.8	8.3	87	2.98	10	77	73	62
16	0.8	9.4	112	1.86	16	104	99	85
25	1.0	11.7	172	1.19	25	139	132	112
35	1.0	13.6	220	0.827	35	172	164	139
50	1.2	16.0	310	0.579	50	225	214	182
70	1.2	18.1	413	0.413	70	261	248	211
95	1.4	20.4	542	0.331	95	336	319	272
120	1.4	22.3	644	0.248	120	407	387	330
150	1.6	25.5	730	0.199	150	462	439	374
185	1.6	28.0	895	0.156	185	514	488	416
240	1.8	31.7	1015	0.124	240	616	585	499

Temperature deviation conversion factor

Ambient temperature (°C)	Below 60	70.0	80	90	100	110
Conversion factor	1.00	0.91	0.82	0.71	0.58	0.41